

LifeSize® Team MP™
ofrece calidad de alta
definición y realización
integrada de llamadas
multi-punto en un sistema
asequible y fácil de
utilizar.



Vídeo de alta definición de gama alta

LifeSize® Team MP™ combina la inmersión en una vídeo experiencia de alta definición con un gran número de funciones que hacen posible ofrecer una solución de comunicaciones a través de vídeo potente, flexible y fácil de utilizar.

Como todos los productos LifeSize, LifeSize Team MP ofrece vídeo y audio de alta definición con calidad de telepresencia para posibilitar la inmersión del usuario en una experiencia real. Le hace sentir como si estuviera allí, permitiéndole realizar más actividades viajando menos.

LifeSize Team MP constituye una solución de vídeo con múltiples características ideada para establecer conexión entre numerosas personas ubicadas en localizaciones distintas. El establecimiento de vídeo llamadas con varios participantes es fácil y simple gracias al puente multi-punto integrado de alta definición. Puede visualizar cuatro interlocutores sin necesidad de equipos externos, efectuar programación por anticipado o solicitar la ayuda de un técnico.

**Lleve a cabo más actividades.
Viaje menos. Tenga la posibilidad de estar presente.**

Se pueden compartir con todos los participantes presentaciones, documentos y elementos multimedia, lo que permite a cualquiera que tenga compañeros en varias ubicaciones establecer colaboraciones más eficaces.

LifeSize ha diseñado las comunicaciones a través de vídeo teniendo en mente una absoluta sencillez de uso. Confíe en las vídeo comunicaciones para celebrar reuniones presenciales cuando el correo electrónico y el teléfono no sean suficientes.

Principales características de LifeSize Team MP

Calidad de vídeo:

Calidad de telepresencia en alta definición
1280x720 - formato 16x9
30 tramas por segundo

Monitores HD



Cámaras HD panorámicas – de inclinación – zoom (PTZ)



Audio de alta definición



Entrada / salida de audio y vídeo externo

Audio: 2 entradas, 1 salida
Vídeo: 2 entradas, 1 salida

Vídeo conferencias en alta definición punto a punto



Presencia continua (CP) integrada HD multipunto



Product Specifications - LifeSize® Team MP™

System Components

LifeSize codec with stand
High Definition PTZ camera
LifeSize MicPod or LifeSize Phone
Wireless IR remote control
Power supply
Cables

System Configurations

LifeSize codec, LifeSize Camera, LifeSize MicPod
LifeSize codec, LifeSize Camera, LifeSize Phone

Communications

128Kbps – 2.5Mbps (point-point)
128Kbps – 1.5Mbps (multipoint, per call)
H.323, SIP
1 x RJ-45 Network LAN (10/100Mbps)
1 x RJ-45 for LifeSize Networker (PoE Support)
1 x RJ-45 for LifeSize Phone
1 x RJ-11 for analog telephone line
1 x 3.5 mm Mic In for LifeSize MicPod

Support for Single Display Types

Any high definition 720p component video VGA monitor (1280x768)
For additional information on displays, visit:
www.lifesize.com/support

High Definition Camera

LifeSize-designed High Definition pan/tilt/zoom camera (patent pending)
Resolution: 1280 x 720, 30fps
Wide-angle lens, 4x optical zoom, 70 degree field of view
Auto focus
Automatic gain control
10 camera presets
7.5 M / 25 ft. cable, Optional 15 M / 50 ft. cable

Video Specifications / Video Resolution

Maximum Resolutions Widescreen 16:9 Modes
128 Kbps (400 x 244 pixels) Widescreen FCIF
384 Kbps (768 x 432 pixels) Cable TV
512Kbps (848 x 480 pixels) DVD Resolution
768 Kbps (1088 x 608 pixels) 2x DVD Resolution
1 Mbps or higher (1280 x 720pixels) High Definition
Actual resolution depends upon capability of remote end and is impacted by the quality of the communications channel

Video Standards

H.263, H.263+, H.264 and H.239
Supports Dual Streaming with Video Bandwidth Balance

Video Formats

High Definition, 16:9 aspect ratio

Video Inputs (4 Inputs)

1 x High Definition PTZ Camera
1 x S-Video
1 x Composite/RCA In
1 x VGA In

Video Outputs (1 Output)

1 x Component/VGA

Fully Integrated, High Definition Audio Conference Phone

LifeSize-designed full featured conference phone doubles as the microphone for video system
16 microphones in a patent-pending Circular Microphone Array with beam forming for high directivity
100 Hz up to 16 kHz
H.323, SIP support

Stand alone phone option using VoIP
No subwoofer required, no additional microphone pods required
Powered by codec directly through cable

High Definition Active Microphone

Single omni-directional microphone
100 Hz up to 16 kHz
Mute button
Powered by codec directly through cable

Audio Features

High definition audio
GIPS NetEQ packet loss concealment
Full duplex for natural conversations
Echo cancellation for echo-free calls
Automatic gain control
Automatic noise reduction
Audio over analog telephone line

Audio Standards

G.711, G.722, G.722.1C (Polycom® Siren14™), G.729, MPEG-4 AAC-LC

Audio Inputs (3 Inputs)

1 x RJ-45 for LifeSize Phone
1 x RCA line level input (L+R)
1 x 3.5 mm Mic In

Audio Outputs (2 Outputs)

1 x RJ-45 for LifeSize Phone
1 x RCA Main audio output (L+R)

User Interface & Features

Context sensitive user interface
Wireless IR remote
Connect participants from integrated speakerphone
Graphical User Interface Call Manager
Virtual Multiway support
13 localized languages supported
Customizable background screen
Selectable camera icons & live preview

Security

Flash-based Web management tool
Administrator and User-level passwords
SNMP security alerts
Ability to disable HTTP, SSH and Telnet services
H.235 encryption support including strict compliance
Kensington Lock™ feature

Intelligent Networking Features

IPv4 and IPv6 support
Auto H.323 dialing
When used with LifeSize Networker:
H.320 dialing
Auto SPID detect
Downspeeding

Directory and Address Book

Up to 1000 local directory entries
Save, Lock, Remove Redial List features
Missed call notification
Auto-Discovery directory lookup (patent pending)
LDAP (H.350) support
Meetings Directory support
Hierarchical address book

Embedded HD Multipoint Control Unit

4-way HD CP multipoint conferencing for video/audio
Virtual Multiway allows participant viewing control (patent pending)
H.239 multipoint support
Seamlessly add/drop participants
Integrated management with LifeSize Control management software

System Management

Out of box setup via web interface and web management tool
SNMP

Power

AC Voltage 100-240V, 50-60 Hz, 2.5A


Environmental Data

Operating temperature:
0°C (32°F) to 35°C (95°F)
Operating humidity:
15% to 85%, non-condensing
Storage temperature:
-20°C (-4°F) to 60°C (140°F)
Storage humidity: 10% to 90%, non-condensing

Regulatory Model Number
Model: LFZ-001

For additional information: www.lifesize.com/support

Information contained in this document is preliminary and subject to change without notice. LifeSize is a registered trademark or trademark of LifeSize Communications in the U.S. and other countries. Copyright 2008. All rights reserved. January 2008.

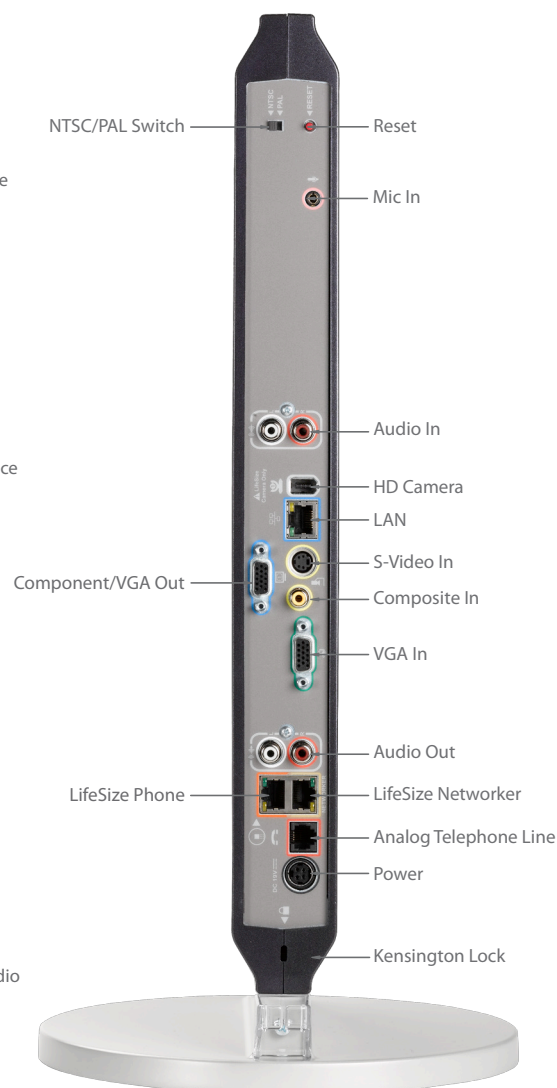

Corporate Headquarters:
901 S. Mopac Expressway
Building 3, Suite 300
Austin, Texas 78746 USA

Phone: +1 512 347 9300
Fax: +1 512 347 9301
Email: info@lifesize.com
www.lifesize.com

EMEA:
LifeSize Communications
Toll-Free Europe
008000 999 09 799

APAC:
LifeSize Communications
Hong Kong
Phone: +852 8239 3695