

# TANDBERG Entrypoint™

Entrypoint is a network device that enables simpler video access into an organization through intuitive menu systems. One main address or number can be distributed to customers and partners, allowing instant access to specific resources within the enterprise. Ad-hoc accessibility means no advance planning from IT is required to enable video users outside of your network to connect with you.



#### DESIGN FEATURES

- Fully integrated, easily configurable unit
- Compact size: 1U tall and 19" rack mountable
- Front LCD panel for ease of configuration
- Supports E1/T1/PRI (optional)
- Optional 3G and/or audio gateway

#### APPLICATION FEATURES

- Ad-hoc accessibility between the public and the company
- Fully managed by TANDBERG Management Suite (TMS) v11.7
- Customized welcome screen, menus and phonebooks

#### PERFORMANCE FEATURES

- Easy to use, plug-and-play technology
- Supports network and video equipment from multiple vendors
- BRI: Up to 8 concurrent calls H.324/PSTN-to-H.323/SIP
- E1/T1/PRI: Up to 30 concurrent calls H.324M-to-H.323/SIP

PROTECT YOUR TECHNOLOGY INVESTMENT WITH TANDBERG'S PORTFOLIO OF **CONSTANT CARE SERVICES**. VISIT [WWW.TANDBERG.NET](http://WWW.TANDBERG.NET)

#### SYSTEM CAPACITY

BRI: Up to 8 concurrent H.324/PSTN-to-H.323/SIP calls  
E1/T1/PRI: Up to 30 concurrent H.324M-to-H.323/SIP call

#### TRANSCODING

AMR-to-G.711  
VIDEO TRANSCODING  
H263 CIF→QCIF  
H263 max 700 kbit→384-45 kbit

#### NETWORK INTERFACES

4 x Ethernet (10/100/1000 Mbit)  
4 x ISDN BRI S/T (BRI version)  
1 x ISDN PRI T1/E1 (Single E1/T1/PRI version)

#### ETHERNET CONNECTIVITY

TCP/IP, SSL, Telnet, HTTP, HTTPS, SSH  
XML for remote management  
SNMP  
Embedded web-server

#### SUPPORTED STANDARDS

H.324M, Q.931, H.323, H.225, H.245 and SIP  
AMR and G.711  
H.263  
H.264 (not supported in menu system)  
G.722 (not supported in menu system)

#### GATEWAY FEATURES

PSTN (VoIP) gateway  
Voice and Video IVR  
Interactive phone book (requires TMS)  
Direct Inward Dialing — DID  
Menu service

#### SECURITY FEATURES

Secure management via HTTPS, SSH and XML/SOAP  
Services may be disabled for security: Telnet, SNMP  
HTTP, HTTPS

#### SYSTEM MANAGEMENT

Total management via embedded web-server using HTTPS,  
SNMP, SSH, Telnet, XML/SOAP  
Supported in TANDBERG Management Suite v11.7 or newer

#### ENVIRONMENTAL DATA

Operating temperature:  
0° C to 40° C (32° F to 104° F)  
Relative humidity: 10% to 90%  
Storage and transport temperature:  
-20° C to 80° C (-4° F to 140° F) non-condensing

#### POWER

100-240VAC, 50-60Hz, 250W max.

#### PHYSICAL DIMENSIONS

Height: 1.7" (44mm)  
Width: 16.8" (426mm)  
Depth: 16.4" (419mm)  
19" rack mountable, 1U height

#### APPROVALS


Directive 73/23/EEC (Low Voltage Directive)  
-Standard EN 60950-1  
Directive 89/336/EEC (EMC Directive)  
-Standard EN 55022, Class A  
-Standard EN 55024  
-Standard EN 61000-3-2/-3-3  
Directive 1999/5/EEC (R&TTE Directive)  
-Standard TBR4  
Approved according to UL 60950-1 and  
CAN/CSA C22.2 No. 60950-1-03  
Complies with FCC15B Class A

All specifications subject to change without notice; system specifics may vary.

All images in these materials are for representational purposes only; actual products may differ.

TANDBERG, Entrypoint and Expressway are registered trademarks or trademarks of TANDBERG in the U.S. and other countries.

All other trademarks are property of their respective owners.

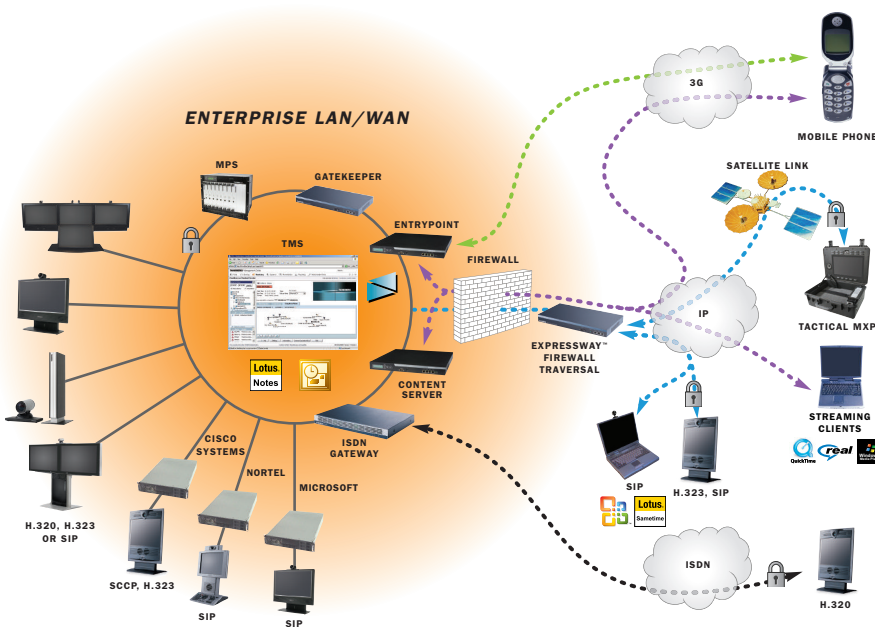

## TANDBERG

# Entrypoint™

TANDBERG WORLD HEADQUARTERS  
Philip Pedersens vei 20  
1366 Lysaker, Norway  
Tel: +47 67 125 125  
Fax: +47 67 125 234  
Video: +47 67 126 126  
E-mail: tandberg@tandberg.net

1212 Avenue of the Americas  
24th Floor  
New York, NY U.S.A. 10036  
Tel: +1 212 692 6500  
Tel: +1 800 538 2884 (toll free in the U.S.)  
Fax: +1 212 692 6501  
Video: +1 212 692 6535  
E-mail: tandberg@tandbergusa.com

March 2007